


STANDARD PERPENDICULAR RAMPS

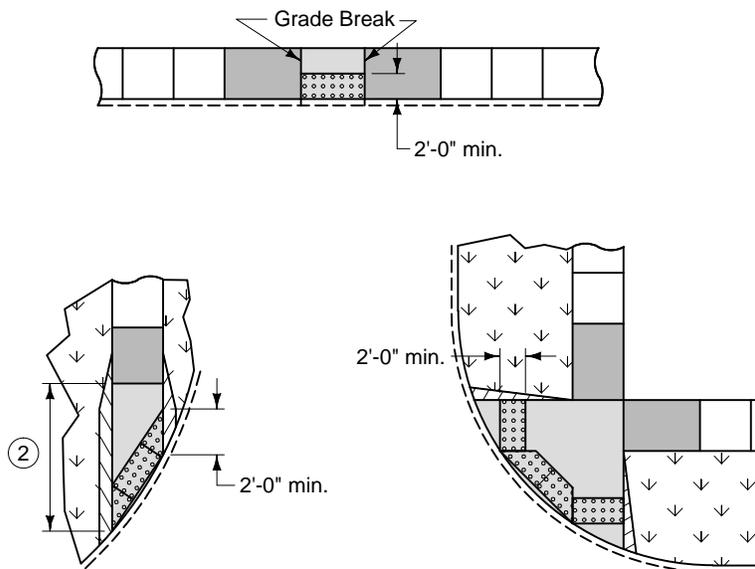

PARALLEL RAMPS

Key

-  Curb Ramp
-  Turning Space
-  Detectable Warning

- Provide a minimum 2 foot width of detectable warning surfaces in the direction of pedestrian travel across the full width of the curb ramp or turning space, exclusive of curbs or flares.
- ① When detectable warning is located on curb ramp surface, orient domes in the direction of pedestrian travel.
 - ② When the distance between the grade break and the back of curb is less than 5 feet, place detectable warning surface at the bottom of the curb ramp.

Where one corner of the curb ramp is more than 5 feet from the back of curb, construct curb ramp as a parallel curb ramp. Move grade break back as required to place detectable warning on turning space at the back of curb.

FILE NO.: 2700-206
APPROVAL DATE: MAY 2014
REVISION NO.:
REVISION DATE:

CEDAR RAPIDS METROPOLITAN AREA
STANDARD DETAILS FOR PUBLIC IMPROVEMENTS

DETECTABLE WARNING PLACEMENT

NO.
2700-206