


Notes


1. Provide epoxy flooring in the shaded areas shown up to existing flooring in adjacent areas. Utilize Sherwin Williams General Polymer System with Deco-Flake, or approved equal.
2. Contractor to install epoxy base coat, two coats of epoxy with broadcast Deco-Flake, and a slip resistant top coat epoxy.
3. Contractor shall be responsible to utilize all materials necessary to prepare and complete the installation of the epoxy coating according to manufacturer's recommendations, including preparatory work to the existing slab using sealing, priming, coatings, color coats, and top coats for a complete installation.
4. Contractor shall include finish color materials from a full range available from the manufacturer to allow Owner to make a finish selection.



Distribution Maintenance Building

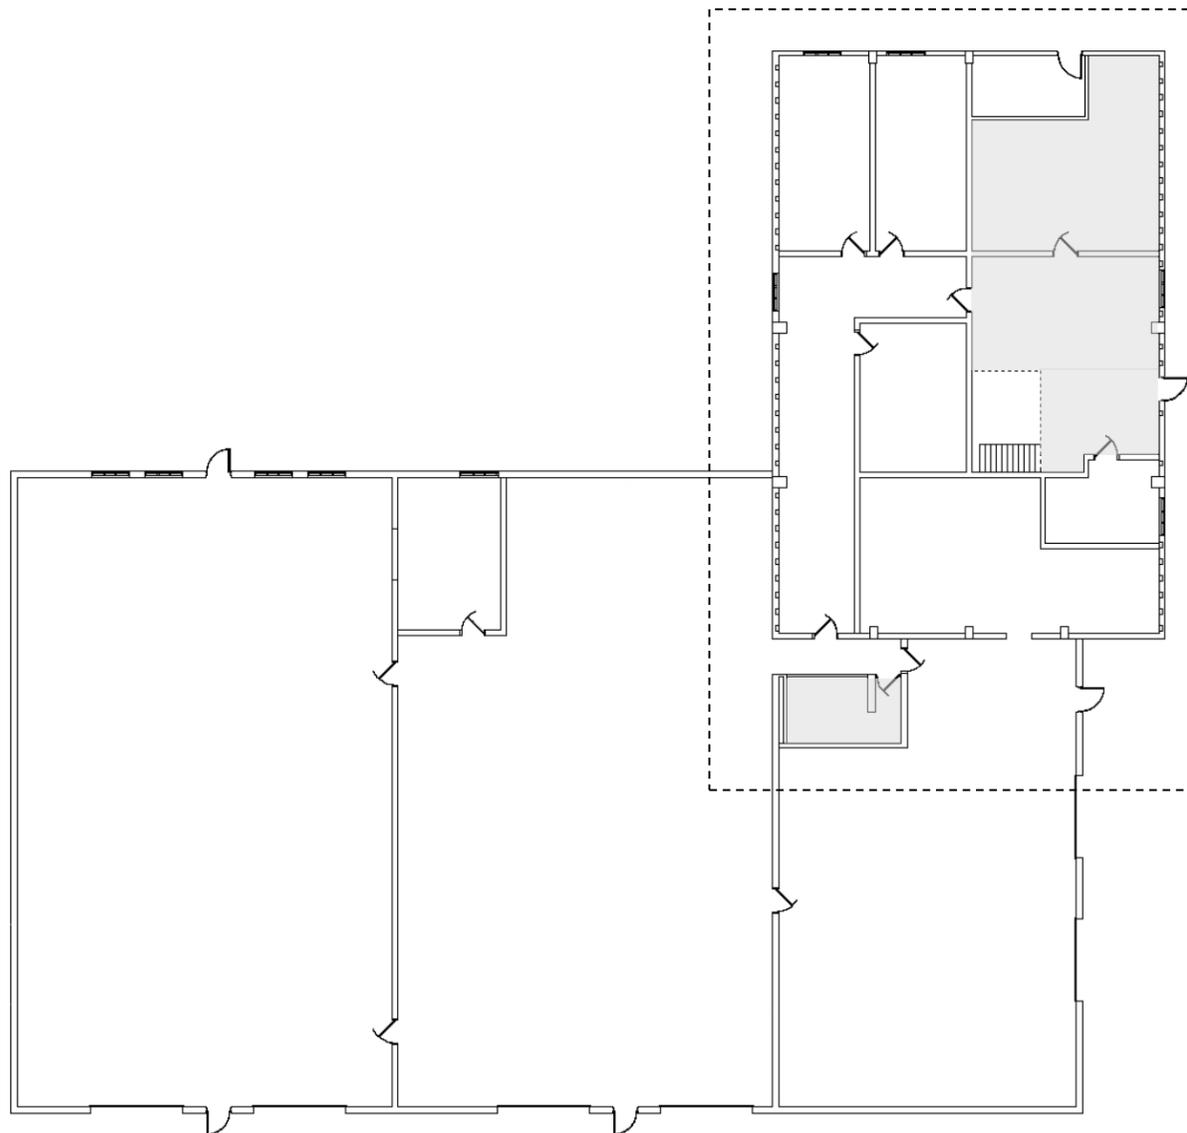

North

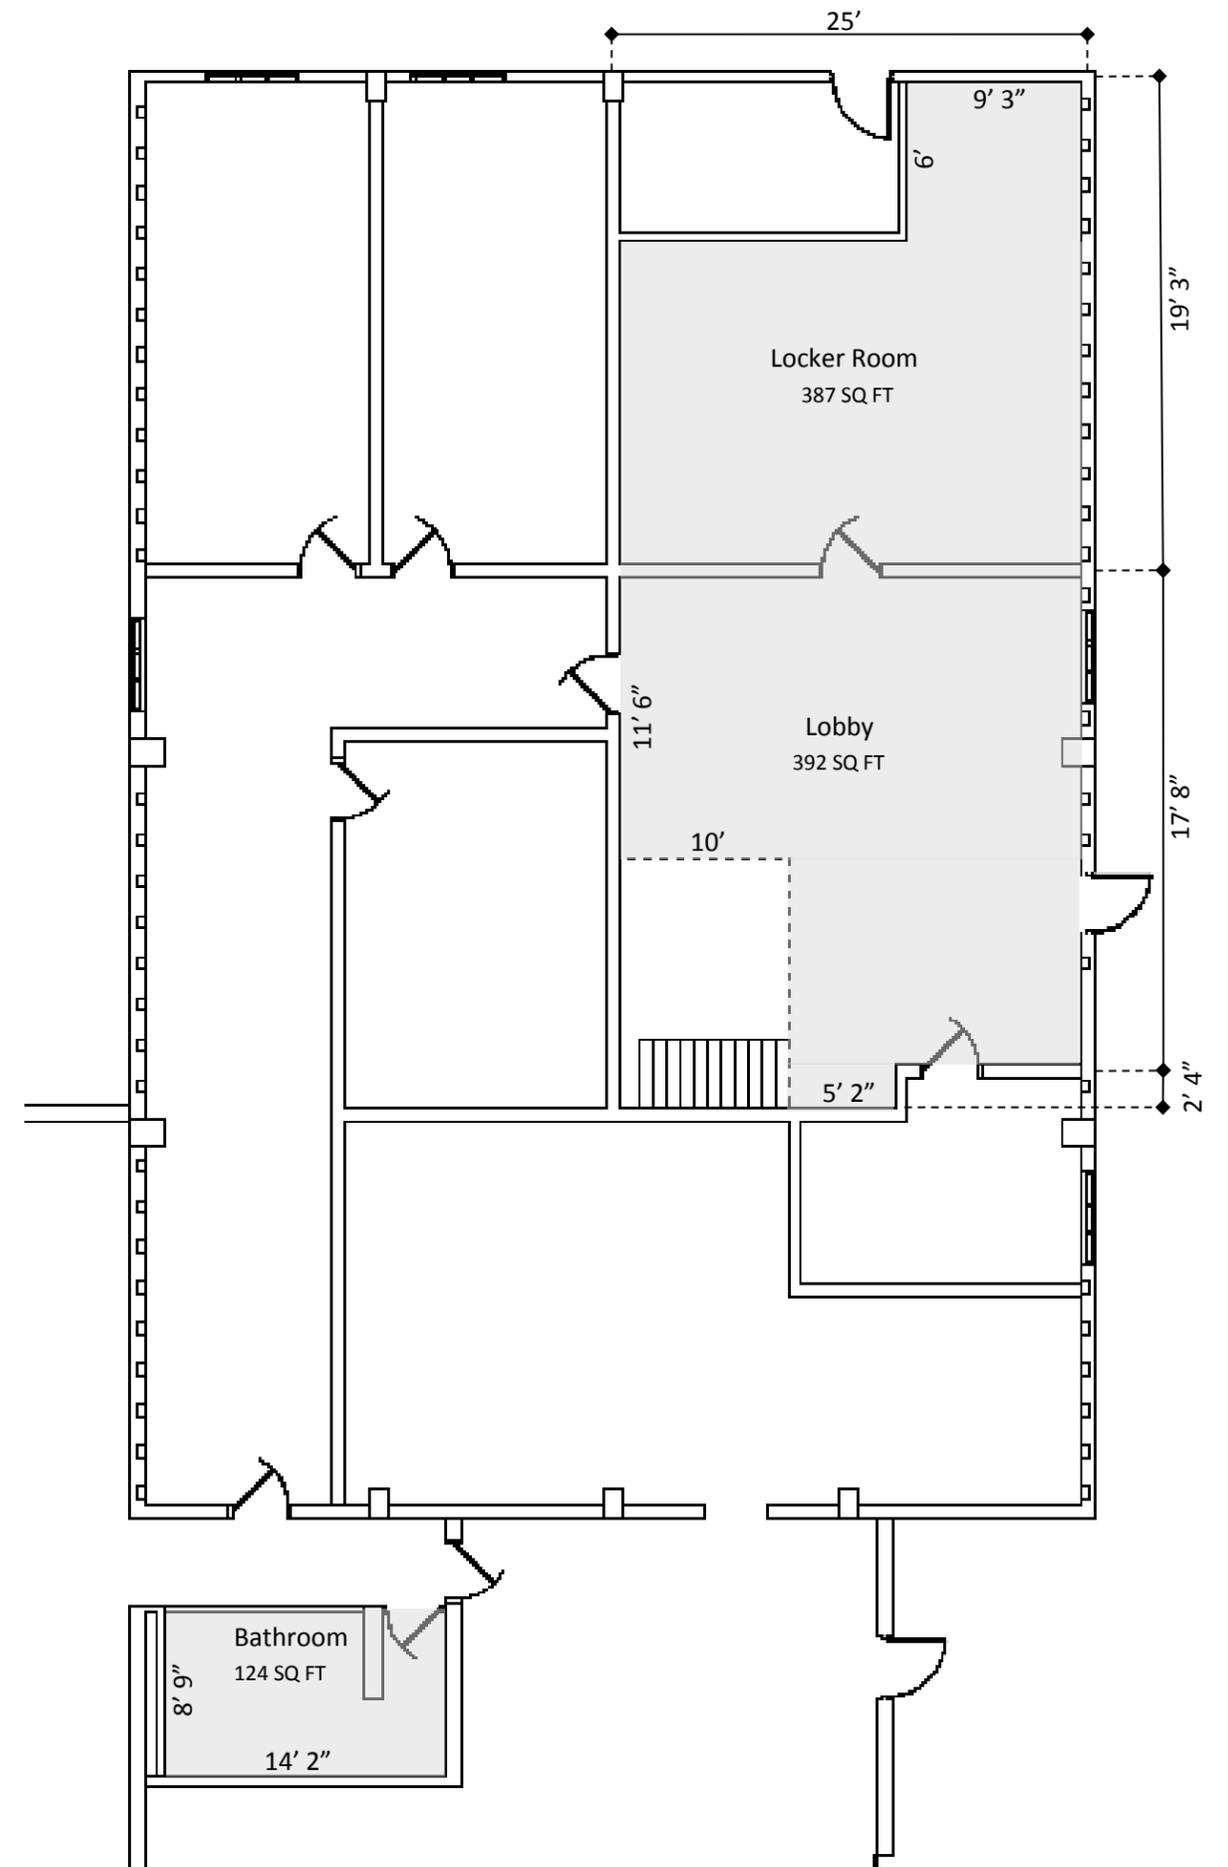

Lobby Notes:

1. Contractor to remove and reinstall doors, baseboard, and trim as necessary to properly apply epoxy flooring throughout the space.
2. Owner to relocate furniture and non-structural obstructions from the floor prior to start of the flooring work. Coordinate the timing of the flooring installation to minimize disruption to Owner.




Lobby: Northwest Corner



Lobby: Southwest Corner



Lobby: Northeast Corner

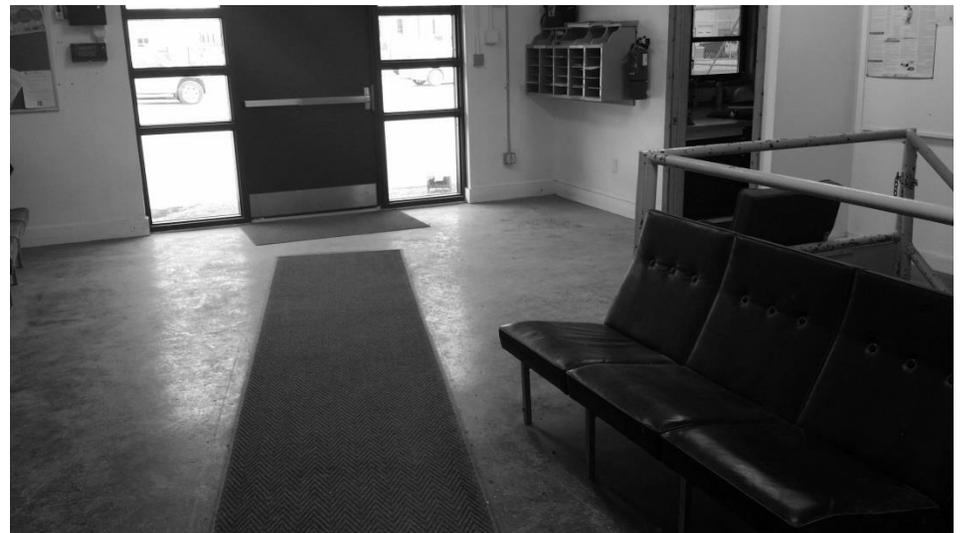

Lobby: Southeast Corner

Locker Room Notes:

1. Contractor to remove existing floor tile where remaining.
2. Contractor to remove and reinstall doors and trim as necessary to properly apply epoxy flooring throughout the space. Remove existing 4" rubber base materials and replace with new (match existing) once floor is complete.
3. Owner to relocate furniture, lockers, and non-structural obstructions from the floor prior to start of the flooring work. Coordinate the timing of the flooring installation to minimize disruption to Owner.



Locker Room: East Side



Locker Room: Northeast Corner



Locker Room: Southeast Corner



Locker Room: West Side

Bathroom Notes:

1. Contractor to remove existing floor tile.
2. Contractor to remove and reinstall doors and trim as necessary to properly apply epoxy flooring throughout the space. Remove existing 4" rubber base materials and replace with new (match existing) once floor is complete.
3. Owner to relocate obstructions from the floor prior to start of the flooring work. Owner will not relocate plumbing fixtures or stall partitions. Coordinate the timing of the flooring installation to minimize disruption to Owner.



Bathroom: West Side



Bathroom: East Side



Bathroom: Entry