


FILL SECTION

NOTES:

1. MAXIMUM 9%. CONSTRUCT 10 FT MINIMUM LENGTH VERTICAL CURVE, BEGINNING AT BACK OF WALK, IF SLOPE EXCEEDS 4%.
2. MINIMUM PAVEMENT THICKNESS FOR RESIDENTIAL DRIVES IS 5 INCH PCC. MINIMUM PAVEMENT THICKNESS FOR COMMERCIAL ENTRANCES IS 6 INCH PCC.

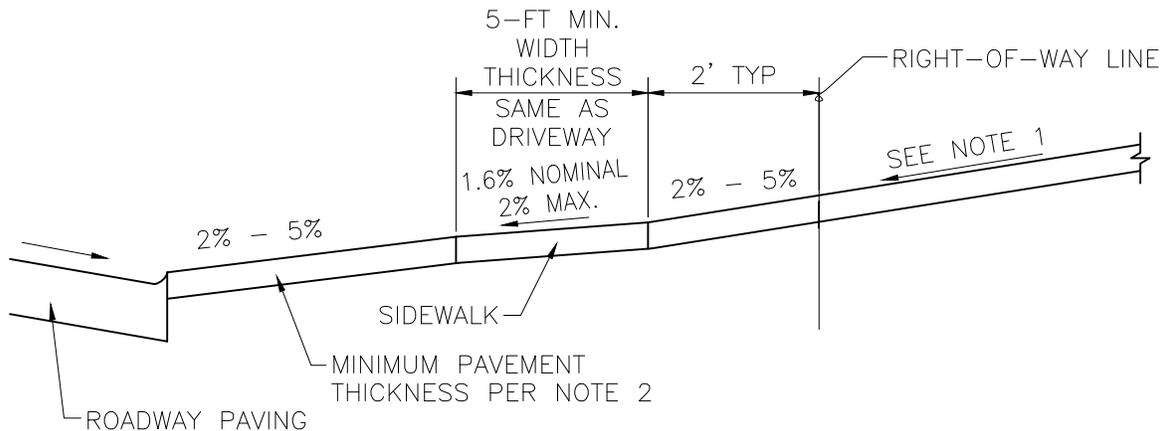

CUT SECTION

NOTES:

1. MAXIMUM 9%. CONSTRUCT 10 FT MINIMUM LENGTH VERTICAL CURVE, BEGINNING AT BACK OF WALK, IF SLOPE EXCEEDS 5%.
2. MINIMUM PAVEMENT THICKNESS FOR RESIDENTIAL DRIVES IS 5 INCH PCC. MINIMUM PAVEMENT THICKNESS FOR COMMERCIAL ENTRANCES IS 6 INCH PCC.
3. SURFACE DRAINAGE ONTO R.O.W. MUST BE APPROVED BY CITY ENGINEER.

FILE NO.: 2700-110
APPROVAL DATE: APRIL 2003
REVISION NO.: 2
REVISION DATE: FEB. 2015

**CEDAR RAPIDS METROPOLITAN AREA
STANDARD DETAILS FOR PUBLIC IMPROVEMENTS**

TYPICAL DRIVEWAY GRADES

NO.
2700-110