Key

- Curb Ramp
- Turning Space
- Detectable Warning
- Grass or Other Surface

(1) Target slope = 1.5%; Grade break at the Detectible Warning Panel.

(2) Minimum 5 feet by 5 feet. Target slope = 1.5%; maximum slope = 2.0% **IN ALL DIRECTIONS.** Landing space to be tied to the ramp on one side each direction.

(3) Flare width; Target = 1.0', Max = 1.5'; Flare typical length = 6' (Typ) along shortest leg. Provide grade break between flare and ramp.

(4) Crosswalk cross-slope, maximum 2% slope if stop or yield condition; maximum 5% or match roadway slope which is ever lower.

(5) Curb cut removal limits:

a) Crosswalk cross-slopes 0-4%:
See "Type B Curb Repair Detail 2700-093

b) Crosswalk cross-slopes 4%+:
Add an additional 2' in each direction.

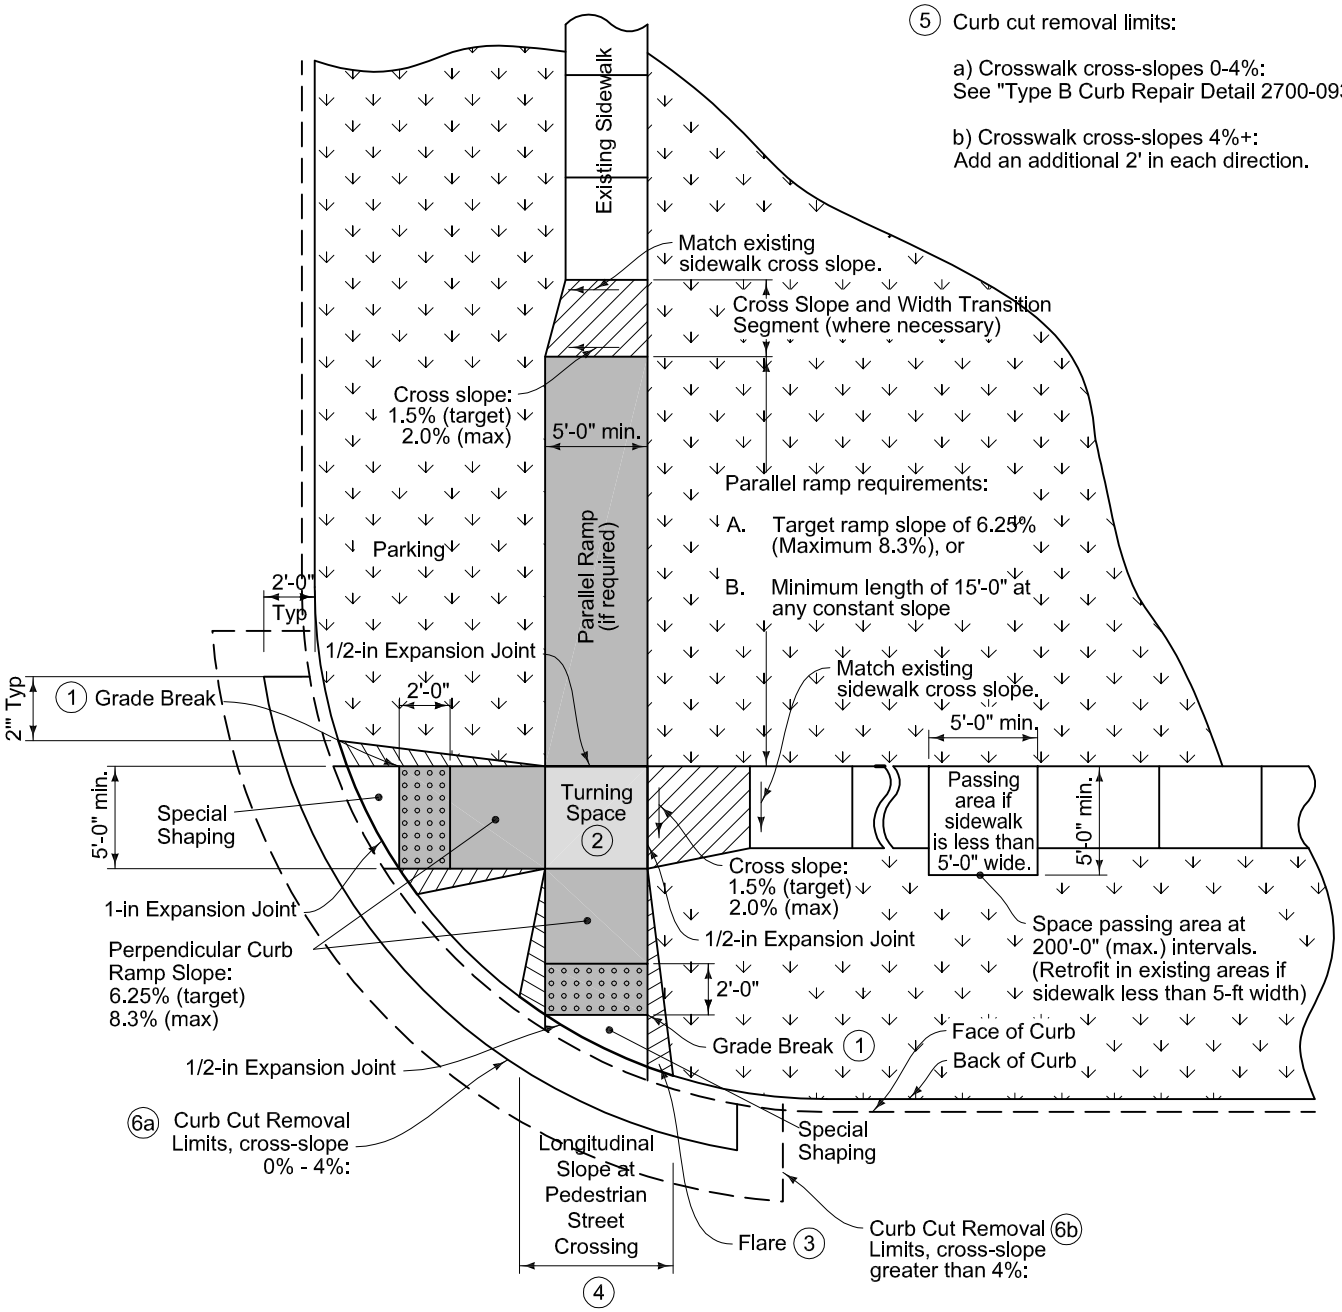

FILE NO.: 2700–200	CEDAR RAPIDS METROPOLITAN AREA STANDARD DETAILS FOR PUBLIC IMPROVEMENTS	
APPROVAL DATE: MAY 2014		
REVISION NO.: 2	GENERAL FEATURES OF AN ACCESSIBLE SIDEWALK	NO. 2700–200
REVISION DATE: AUG 2016		