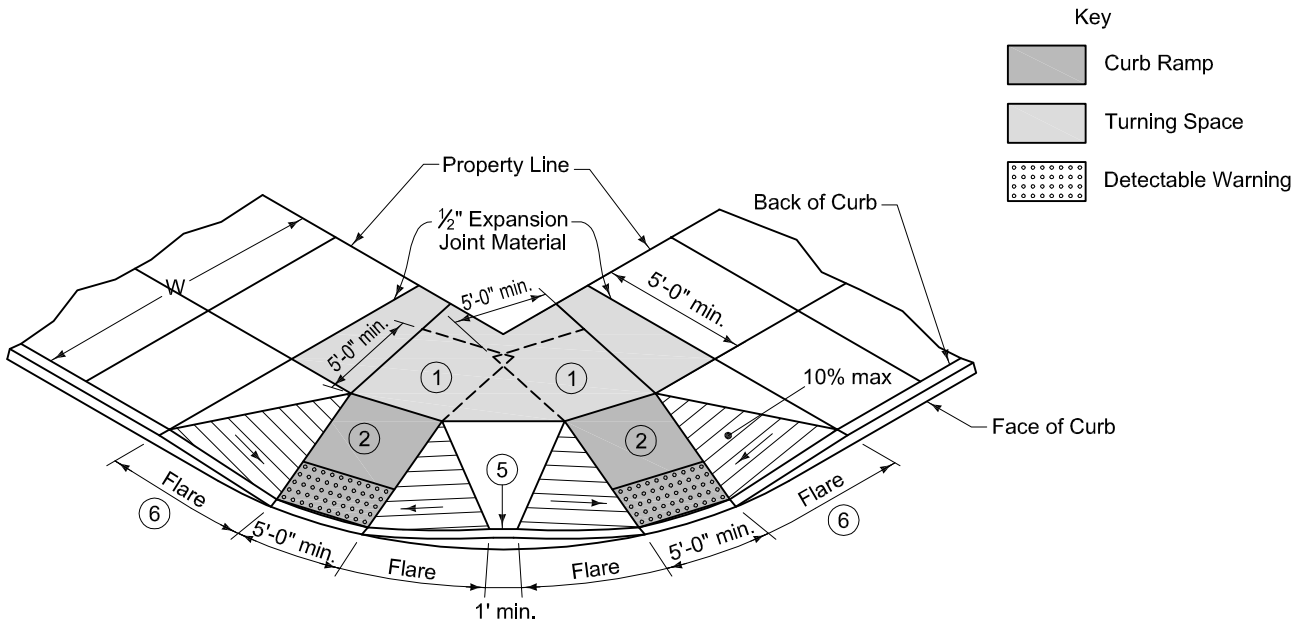

CONTIGUOUS STANDARD SIDEWALK CURB RAMP

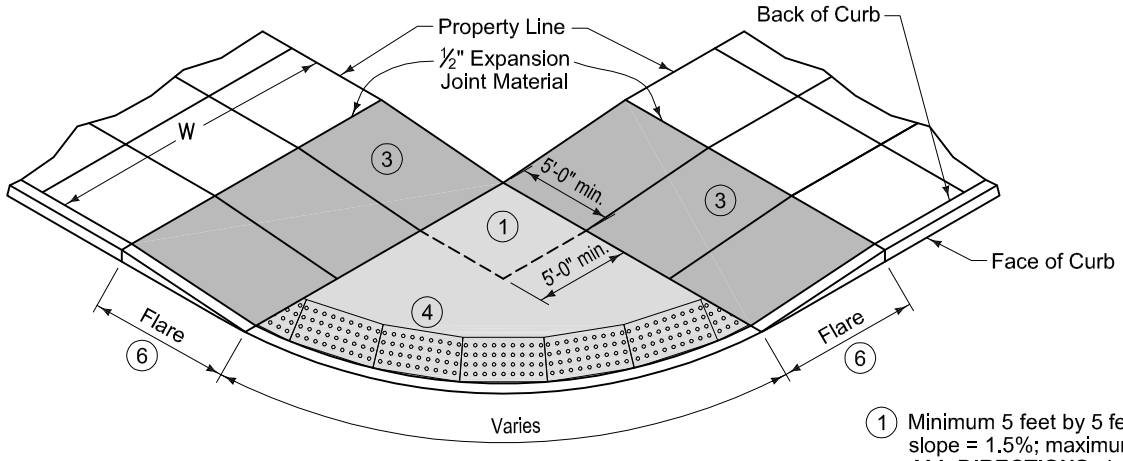

CONTIGUOUS RADIAL SIDEWALK CURB RAMP

1. Minimum 5 feet by 5 feet. Target slope = 1.5%; maximum slope = 2.0% **IN ALL DIRECTIONS**. Landing space to be tied to the ramp on one side each direction. (turning spaces may overlap).

2. Perpendicular Curb Ramp: Target running slope of 6.25% with maximum running slope of 8.3%.

3. Parallel ramp requirements:
   A. Target ramp slope of 6.25% (Maximum 8.3%), or
   B. Minimum length of 15'-0" at any constant slope

4. Use approved radius panels or cut panels as required to provide continuous detectable warning around radius.

5. Minimum curb height 2.5-inches. Match street curb height if feasible.

6. 10% or flatter

FILE NO.: 2700–205	CEDAR RAPIDS METROPOLITAN AREA STANDARD DETAILS FOR PUBLIC IMPROVEMENTS	
APPROVAL DATE: MAY 2014		
REVISION NO.: 2	CURB RAMPS FOR CONTIGUOUS SIDEWALK BETWEEN STREET AND RIGHT–OF–WAY	NO. 2700–205
REVISION DATE: AUG 2016		