


**Note:**

Stake only in areas where high winds or vandalism is an issue. Install Stakes in undisturbed soil. Use 3" wide webbing straps (or approved alternate) and secure to stakes with heavy gauge wire. The wire should be able to stick straight out from the stake and hold the webbing strap up, preventing it from sliding down the tree. Do not stake tightly. Remove all stakes after one year.

Use of tree wrap is not recommended. If used on thin barked trees, it shall be white, breathable, expandable and removed by the contractor after one year.

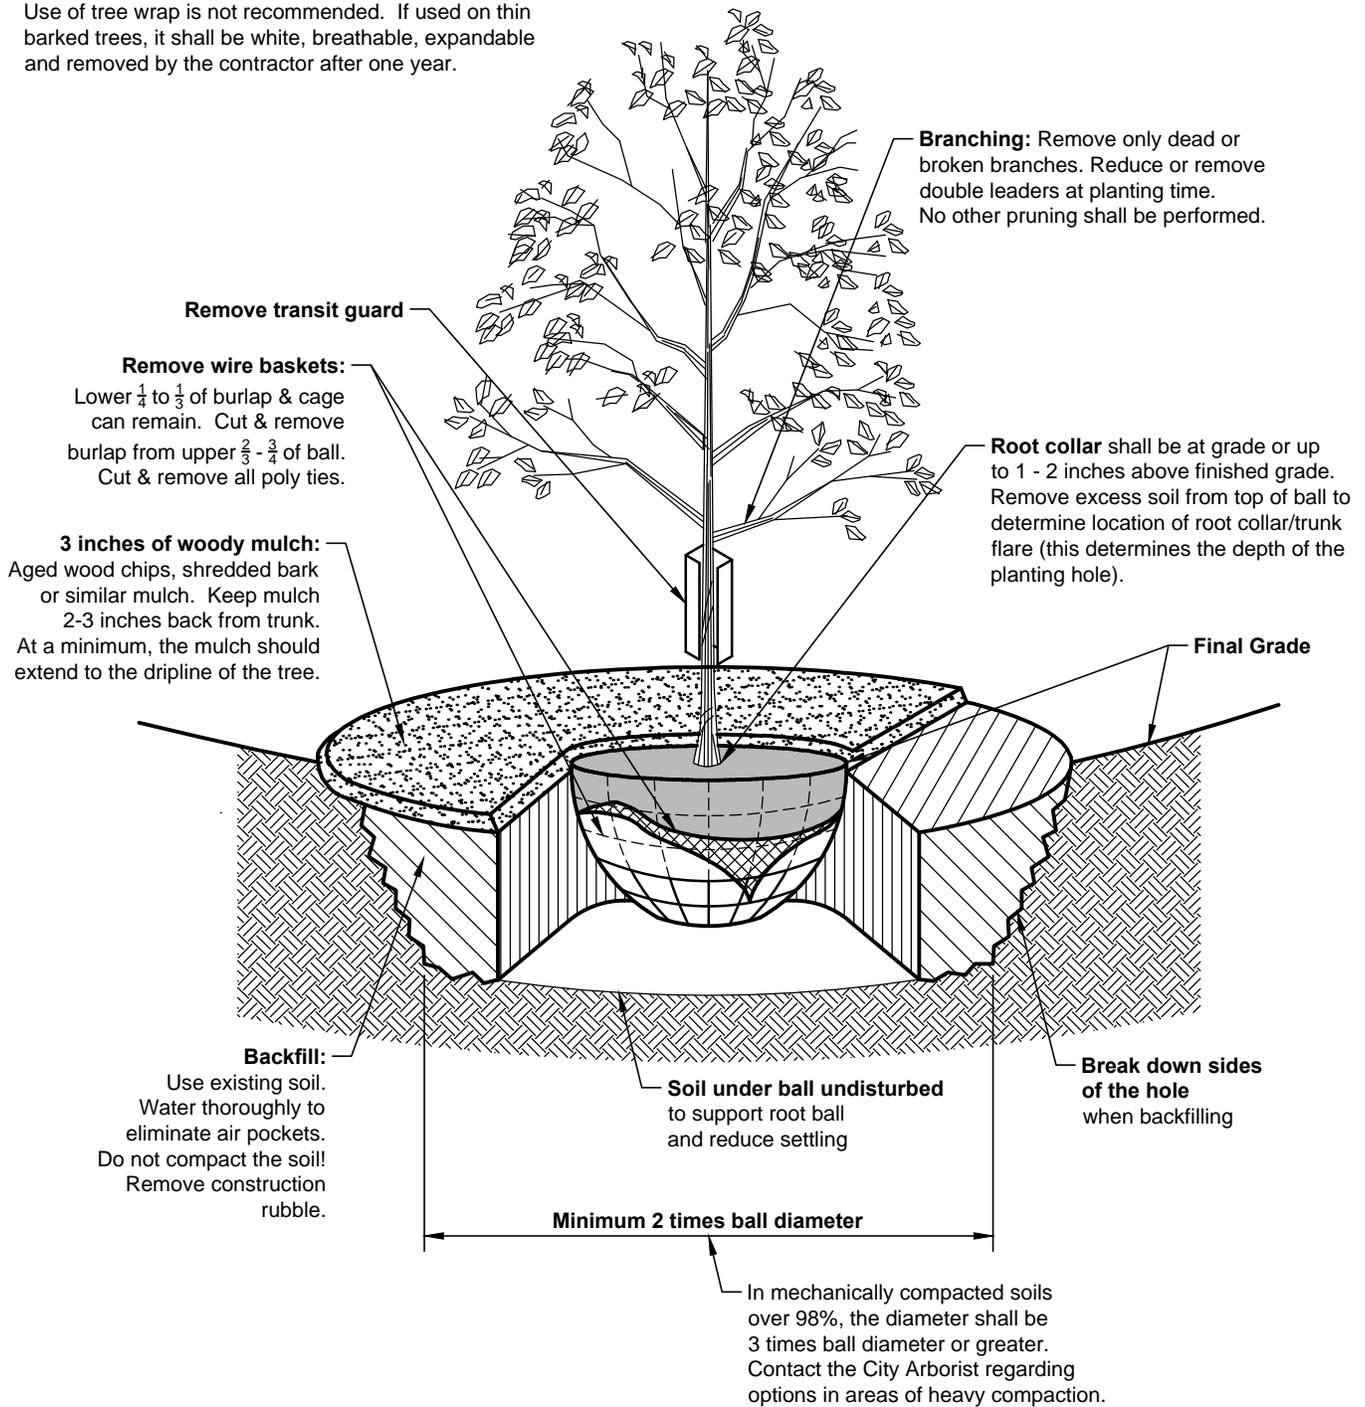

File Name: w:\tools and utilities\drafting standards\cma std details\2910-024 tree protection details.dwg

FILE NO.:	<b>CITY OF CEDAR RAPIDS PUBLIC WORKS DEPARTMENT STANDARD DETAIL (MANDATORY FOR CITY PROJECTS - RECOMMENDED FOR ALL OTHER PROJECTS)</b>	
DATE: JAN. 2014		
REVISION NO.:	<b>TREE PLANTING DETAIL</b>	
REVISION DATE:		
		<b>NO. 2910-024</b>