
Cedar Rapids Parks & Recreation Department

2017 - Ellis Golf Course Asphalt Parking Lot Overlay

City of Cedar Rapids, Iowa

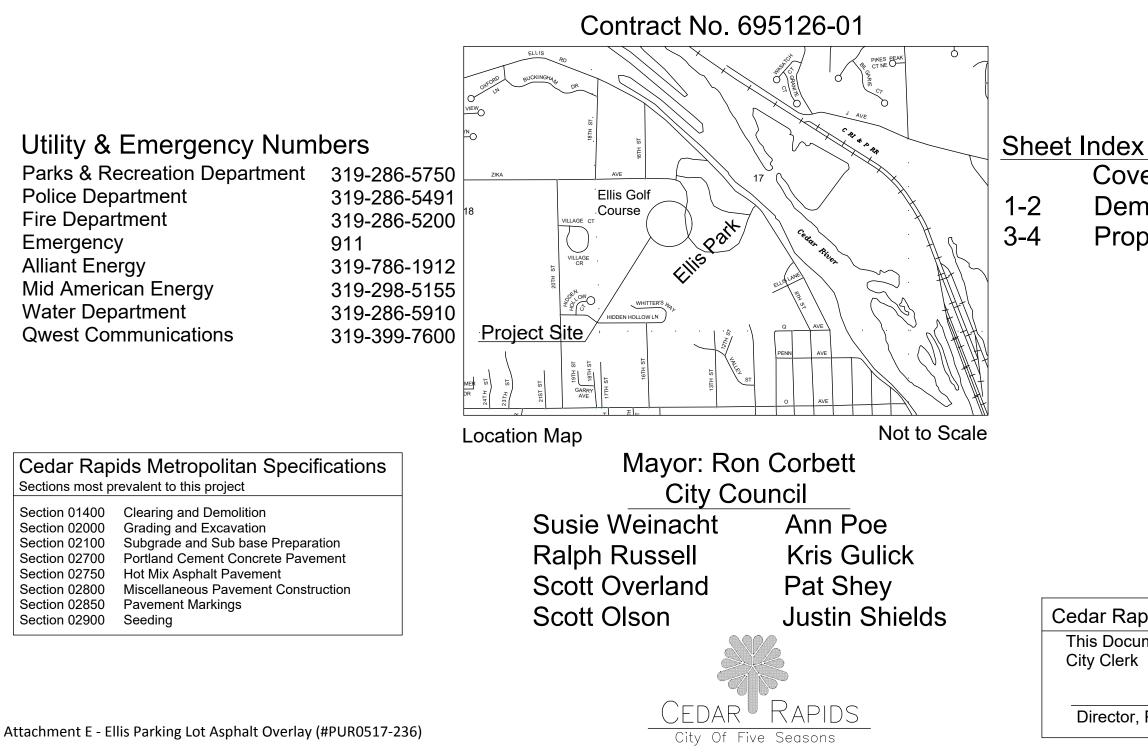

ndex Cover Sheet Demolition / Removals Proposed Improvements

Cedar Rapids Parks & Recreation Department This Document is Recommended for Filing with the City Clerk

Director, Parks & Recreation

Date

Remove existing asphalt and sub-base material in hatched areas

e at cart path back to 6 feet north ct edge and overlay for transition.

Owner:

2. Contractor shall locate and protect all existing structures and utilities during construction. Any damage to existing structures or utilities shall be repaired by the contractor to the satisfaction of the owner at the contractor's expense. Contractor shall install orange construction fencing around work areas as needed during construction to keep the public out of construction areas.
The contractor for this project is responsible for working with the Clty of Cedar Rapids Parks and Recreation Department, Golf Division, to coordinate work as

6.

full depth and dispose of off site. Contractor shall remove existing curb stops and store on-site, in an area approved by the owner, for re-installation once project is complete. 9. Contractor shall remove existing sub-base material to allow for 6-inches of

owner.

North

2017 - Ellis Golf Course Asphalt Parking Lot Overlay

exist	ing	as	oha	alt	an	d
mat	eria	I.				

V.	
1.	

NO. REVISION DESCRIPTION

CEDAR RAPIDS

roadw

Mill edge adjacent to n

DRAWN BY: APPROVED B

FILE NAME:

Ellis Golf Parking Lot Repairs

1401 Zika Avenue NW Cedar Rapids, la. 52405

Clty of Cedar Rapids Golf 500 15th Avenue SW Cedar Rapids, Ia. 52404

Demolition Notes:

1. Contractor shall call lowa One Call (1-800-292-8989) 48 hours in advance of any work commencing on the project.

to alleviate any conflicts with Golf patrons and large outings.

5. Contractor is responsible for any construction staking and layout needed on the project. Contractor shall mark the elevations of the existing pavement in areas to be removed as needed to aid in placing patches and new overlay at correct elevations.

Contractor shall coordinate marking of removal areas with owner prior to removals.


7 Contractor shall remove existing asphalt (+/- 4-inches) and sub-base material

new granular sub-base material and 2-inches of asphalt base material to bring removal areas up to existing parking lot grades.

 Where the parking lot overlay meets existing asphalt roadways or walkways, mill down a to depth of 1-1/2 inches for a width of 2.0 feet and place new asphalt in transition to match existing grades.

11. When working around trees adjacent to the existing parking lot care shall be taken to disturb the root structure of the tree as minimally as possible. Sub-base material thickness may be decreased in these areas with approval of the

12. It is the responsibility of the contractor to review the plans in the field for accuracy before bidding.

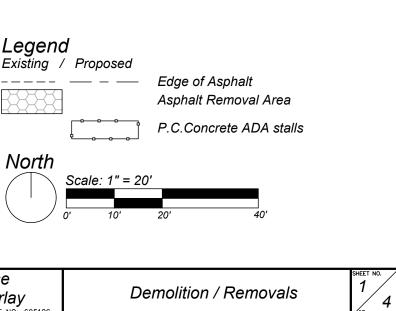

edge at cart path back to 6 feet north of project edge and overlay for transition.

Remove existing asphalt and sub-base material.

Mill edge at project boundary adjacent to existing asphalt per notes.

FILE NAME:	DRAWN BY:					
FILE NAME.	APPROVED BY:					
	APPROVED DT:				77	
					77	Cedar Rapids
		NO.	REVISION DESCRIPTION	APPROVED	DATE	City Of Five Seasons

2017 - Ellis Golf Course Asphalt Parking Lot Overlay

Mill edge adjacent to roadw_d

Owner:

Ellis Golf Parking Lot Repairs

1401 Zika Avenue NW Cedar Rapids, Ia. 52405

Clty of Cedar Rapids Golf 500 15th Avenue SW Cedar Rapids, Ia. 52404

Demolition Notes:

1. Contractor shall call lowa One Call (1-800-292-8989) 48 hours in advance of any work commencing on the project.

Contractor shall locate and protect all existing structures and utilities during construction. Any damage to existing structures or utilities shall be repaired by the contractor to the satisfaction of the owner at the contractor's expense. 3. Contractor shall install orange construction fencing around work areas as needed during construction to keep the public out of construction areas.

4. The contractor for this project is responsible for working with the Clty of Cedar Rapids Parks and Recreation Department, Golf Division, to coordinate work as to alleviate any conflicts with Golf patrons and large outings.

Contractor is responsible for any construction staking and layout needed on the project. Contractor shall mark the elevations of the existing pavement in areas to be removed as needed to aid in placing patches and new overlay at correct elevations.

6. Contractor shall coordinate marking of removal areas with owner prior to removals.

7 Contractor shall remove existing asphalt (+/- 4-inches) and sub-base material full depth and dispose of off site.

8. Contractor shall remove existing curb stops and store on-site, in an area approved by the owner, for re-installation once project is complete.

9. Contractor shall remove existing sub-base material to allow for 6-inches of new granular sub-base material and 2-inches of asphalt base material to bring removal areas up to existing parking lot grades.

 Where the parking lot overlay meets existing asphalt roadways or walkways, mill down a to depth of 1-1/2 inches for a width of 2.0 feet and place new asphalt in transition to match existing grades.

11. When working around trees adjacent to the existing parking lot care shall be taken to disturb the root structure of the tree as minimally as possible. Sub-base material thickness may be decreased in these areas with approval of the owner.

12. It is the responsibility of the contractor to review the plans in the field for accuracy before bidding.

