

Attachment A

All Sign Blanks shall be Aluminum; Anodized, Alodized, or Approved Equal.
All Sign Blanks shall be free of buckles, warp, dents, cockles, burrs, and defects resulting from fabrication. Sheet Aluminum shall meet requirements of ASTM B 209, Alloy 5052-H38

Figure 1

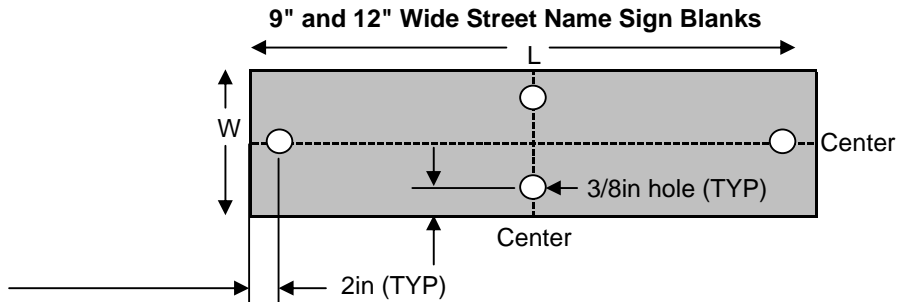


Figure 2

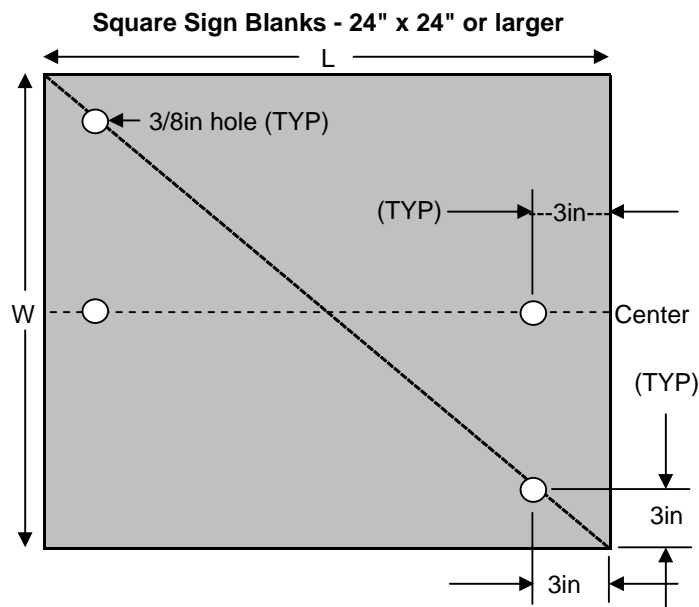


Figure 3

